


REINVENTED EVERY DAY.

CONTENTS

Reinvented Every Day	1-2
Blaster [™]	3
BL [™] 240/400	4
Mate [™]	5
Crossfire [™]	6
Polyhawk [™]	7
PV	8
MDV	9
UTG/RTG	10
Specialty	11-12
Anti-Icer	13
Specifications	14-22

We're proud to say we invented the first automotive snow plow.

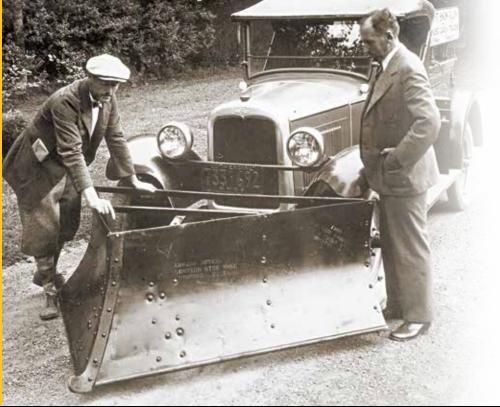

HOTSH

REINVENTED EVERY DAY.

Today, Meyer offers the largest selection of spreaders in the industry, from small walk behinds to large municipal spreaders. If a vehicle is used for work, chances are we have a spreader for it.



But we're even more proud to say that spirit of invention and innovation lives on today. It's our culture to constantly search for ideas and new ways to make snow and ice management easier and more efficient with features like pre-wetting and America's best warranty. Because you're never satisfied until the job is done right, and neither are we.

The 1930s



Developed the T-1 Electric Hydraulic Lift, the first ever.

The 1940s



Designed the first plow for 4-wheel drive vehicles.

The 1970s



In 1972 the Meyer "Mini Spreader" was introduced. The perfect size to control ice where the big trucks couldn't.

The 1990s



In 1999 black thermoplastic replaced fiberglass on the hopper.



Meyer spreaders help control your cost and the impact of ice-melt on the environment by spreading the right amount of material when and where you need it.

Some spreader models shown with optional equipment.

2



BLASTER[™]

YOUR STEADY-FLOWING PREMIUM SPREADER CONTROLS THE FLOW OF ANY MATERIAL

Spreading a wide variety of material requires spreaders to have different performance characteristics. That's why the Meyer Blaster gives you the ability to customize the configuration. From auger options to vibrator kits, you can create the ultimate spreading machine.

All Blasters (except "S" models) come standard with a patented coarse material brush auger to prevent rock salt from leaking out of the hopper throat.

SEE PAGE 14 FOR DETAILED SPECIFICATIONS





QUICK FACTS

VEHICLES: TYPE: CAPACITY: MATERIALS: CONSTRUCTIO

Light to 1-ton Pick-ups, Tractors with 3-point Hitch Receiver Hitch

180 liters (160kg); 360 liters (340kg) Salt or Calcium Chloride

ONSTRUCTION: Polyethylene

One-touch auto control

One-touch operation provides total control over Blaster spreaders. The illuminated in-cab controller (patent pending) includes an on/off switch,

blast mode which provides an on-command 840w surge, and a vibrate mode. Regulate the spinner speed with the variable speed controller. Spinner stops automatically when the brake is applied.

Toughest motor available

Blaster's 1/2 HP/370w motor is the most powerful motor available today. The direct-drive system links the motor directly to the auger, creating up to 75% more auger power to easily grind through large chunks of material and provide an even material spread pattern.







BL 240/400^m

ECONOMICAL ICE CONTROL FOR PROPERTY MANAGERS AND CONTRACTORS

Meyer Base Line tailgate spreaders attach using a 5cm receiver hitch and are perfect for small to medium-sized jobs like long driveways and small lots.



All BL 240/400 models come standard with a patented coarse material brush auger to prevent rock salt from leaking out of the hopper throat.

SEE PAGE 15 FOR DETAILED SPECIFICATIONS

QUICK FACTS

MA

IICLES:	Light Trucks, SUVs, Tractors and Utility Vehicles
PE:	Receiver Hitch
PACITY:	100 liters (110kg.); 175 liters (180kg)
TERIALS:	Bagged Rock Salt
ISTRUCTION:	Polyurethane Hopper, Carbon Steel Frame

Intuitive and reliable variable speed touch pad controller with easy-to-use fast, slow and vibrate buttons delivers a precise spread pattern up to 7,6m.



The BL-240/400's direct-drive system links the 1/8 HP/125w motor directly to the auger, creating up to 75% more auger power than non-direct drive set-ups. The motor provides superior clump-busting performance. Its marine-style electrical plug keeps the water out to ensure consistent electrical flow from the vehicle's battery.



Meyer Blaster/BL Spreader Augers Help Keep Material Moving.

You should always use dry free-flowing material for optimal spreading performance. But if your material tends to get sticky, use the chart below to find the right extensions for your application needs.

Auger Part #	Description	Standard On	Can Be Used With	You Should Use This						
34302	Rock Salt Brush Auger (Coarse Material)	BL 240 BL 400 Blaster 350 Blaster 750R	BL 240 BL 400 Blaster 350 Blaster 350S* Blaster 750R Blaster 750S*	to reduce coarse material like rock salt from leaking out of the hopper when the spinner is idle						
34303	Fine Salt Brush Auger (Fine Materials)	Sold as an accessory only	BL 240 BL 400 Blaster 350 Blaster 350S* Blaster 750R Blaster 750S*	to reduce fine material from leaking out of the hopper when the spinner is idle.						
34306	Steel Spiral Auger	Blaster 350S Blaster 750RS	BL 240 BL 400 Blaster 350 Blaster 350S Blaster 750R Blaster750RS	when applying material made up of different types of aggregate , (e.g., grit and cinders). The steel spiral auger must be used.						
34118	Aggregate Auger Kit	Sold as an accessory only	BL 240 BL 400 Blaster 350 Blaster 350S Blaster 750R Blaster 750RS	to prevent coarse aggregate material (e.g., grit, cinders, gravel), from clogging in the discharge throat.						
34604	Spiked Aggregate Extension Kit (attaches to 34306 or 34118)	Standard on Blaster "S" units.	Blaster 350 Blaster 350S Blaster 750RS Blaster 750R	when you want to focus the agitation of aggregate material that is closer to the throat of the hopper.						
34109	Chained Aggregate Extension Kit (attaches to 34306 or 34118)	Sold as an accessory only	Blaster 350 Blaster 350S Blaster 750R Blaster 750RS	when you want to agitate heavier aggregate like grit or gravel combinations.						
* Auger extensions ca	* Auger extensions cannot be used with brush augers 34302 or 34303.									

PRECAUTION:

All tailgate spreaders, regardless of brand, require the use of free-flowing material for optimum/best performance. USING EXTENSIONS:

Aggregate auger extensions (34604 and 34109) work exclusively with auger 34306 or 34118 and are designed to provide added agitation to non-salt materials, e.g. materials such as grit, gravel, sludge, cinders, etc. These exten-sions are designed to be used in conjunction with the in-hopper baffle kit. Baffle kits come standard with the 750RS and 350S models. Other Blaster models will accept extensions but kit # 34600 is required. Auger extensions can not be used with Rock Salt.

MEET OUR MOVERS AND SHAKERS



"S" Series Blasters. A systematic way to create steady-flowing material.

Let's face it, any spreader is going to be able to dispense "dry, free-flowing material." But the reality is, most material is dry and free flowing for only so long. That's why all Meyer "S" Series Blasters have been designed to systematically create a steady flow of material to the spinner.

"S" series come standard with an on-demand vibrator, a load-bearing baffle plate – that lessens the pressure on the auger – and a multi-spiked auger that reaches deep into the hopper. All of these features work together to break up coagulated material creating a constant flow of material to the spinner. This means you get reliable performance in less than perfect conditions.





THE ONLY STRAP-MOUNTED PICK-UP TRUCK SPREADER

The Mate comes fully assembled and attaches without tools or drilling. A swing-out option (shown below) is also available allowing the owner to access the bed of the

truck from the tailgate. The Mate is perfect for parking lots and driveways.



SEE PAGE 15 FOR DETAILED SPECIFICATIONS

VEHICLES:

TYPE:

3/4-ton + Pick-ups, Tractors with 3-point Hitch Tailgate CAPACITY: 250 liters (270kg) MATERIALS: Salt, Fertilizer and Seed CONSTRUCTION: Polyethylene

One-touch auto control

One-touch operation provides total control over Mate spreaders. The illuminated in-cab controller (patent pending) includes an on/off switch, blast mode which provides an on-command 70 amp surge, and a vibrate mode.



Regulate the spinner speed with the variable speed controller. Spinner stops automatically when the brake is applied.

A commercial-duty 1/8 HP/125w, 12V direct-drive motor drives the spinner directly off the motor drive shaft, providing energy-efficient power to the agitator system for optimum performance and reliability.



Full-width hopper reduces material spillage into the vehicle bed to prevent corrosion.

CROSSFIRE[™]

FEATURING THE INDUSTRY'S ONLY INTEGRATED PRE-WET SYSTEM FOR PICK-UPS

Pre-wetting ice-melt material helps speed up the melting process and reduces how far the granules bounce when they hit the pavement. The end result, a safer surface using less material in less time. Available on deluxe models, intergrated pre-wetting is just one of the many ways the Crossfire is better by design.



UICK FACTS

Vehicles: Type:

CAPACITY: MATERIALS: CONSTRUCTION:





SEE PAGE 16 FOR DETAILED SPECIFICATIONS





3/4-ton and larger Pick-ups

1,1m³ (180cm); 1,5m³ (240cm)

Dry, Free-flowing Rock Salt

Deluxe models

Polyethylene

Insert Hopper with Pre-wet included with

www.meyerproducts.com



POLYHAWK

FEATURES A VIRTUALLY INDESTRUCTIBLE POLY HOPPER

Popular with contractors, the Polyhawk features an unprecedented 10-year warranty on the polyethylene hopper, the Polyhawk is perfect for spreading bulk materials like sand with rock salt.

QUICK FACTS

VEHICLES: TYPE: CAPACITY: MATERIALS: CONSTRUCTION 3/4 to 1-ton Pick-ups Insert Hopper 1,1m³ (180cm); 1,5m³ (240cm) Salt, 50/50 Salt-Sand and Sand Polyethylene

Wireless controls

Our fully integrated wireless controller allows you to start and choke your engine as well as engage your drive system in a simple to use hand-held wireless controller. Electric Polyhawk models available with a hard-wired controller.

Spread material exactly where you need it

With Meyer's two internal and four external baffle adjustment systems, you're able to put down material in the right place, every time. Whether you want to spread four feet to the left, four feet to the right, or spread a thirty foot pattern, you can easily adjust the spreading pattern to meet your needs.

* 10 year warranty applies to poly hopper only.





POLYHAWK[™]

SEE PAGE 16 FOR DETAILED SPECIFICATIONS



PV

LETS YOU PLACE MATERIAL EXACTLY WHERE IT'S NEEDED

Meyer PV spreaders share many of the timesaving, long-lasting features of our larger MDV series spreaders, including two internal and four external baffle adjustment systems. Available with a 10,5 HP/7,8kw Briggs & Stratton engine, 11 HP/8,2kw Honda engine or electric drive, the choices are endless when removing snow and ice from roads and parking lots.

SEE PAGE 17 FOR DETAILED SPECIFICATIONS

QUICK FACTS

VEHICLES: TYPE: MATERIALS: CAPACITY: 3/4-ton and larger Pick-ups Insert Hopper Salt, 50/50 Salt-Sand and Sand Carbon Steel: 1,1m³ (180cm); 1,5m³ (240cm) Stainless Steel: 1,1m³ (180cm); 1,35m³ (210cm); 1,5m³ (240cm)

Our inverted-V helps prevent material from bridging



nverted-V

and slowing down the conveyor.

BL600

Meyer's most economical stainless steel insert hopper spreader.







MDV

HIGHWAY-STYLE SPREADER FOR INCREASED MATERIAL CAPACITY

Meyer Medium Duty V-box (MDV) spreader features two internal and four external baffles, the MDV allows you to spread material exactly where it's needed on larger roads and parking lots.

QUICK FACTS

VEHICLES: TYPE: CAPACITY: MATERIALS: CONSTRUCTION: Medium-duty (GVW 7,5 tons and up) Insert Hopper 2,5m³ (240cm); 3m³ (270cm); 3,4m³ (300cm) Salt, 50/50 Salt-Sand and Sand Stainless Steel

Wireless controls

Our fully integrated wireless controller allows you to start and choke your engine as well as engage your drive system in a simple to use hand-held, wireless controller.





Spinner swings up and out of the way

No tools required, spinner easily swings up and out of the way for easy storing. When the spinner is in the up position, unload any material by running the conveyor.

SEE PAGE 18 FOR DETAILED SPECIFICATIONS





UTG/RTG

CENTER DISCHARGE PERFORMANCE FOR DUMP TRUCKS

Meyer Under-Tailgate and Replaceable Tailgate spreaders use a combination of a self-contained auger with removable spinners. With or without central hydraulics, our electric tailgate models can easily be added to any dump truck so large roads and parking lots can be snow-free in no time.

QUICK FACTS

VEHICLES: BODY WIDTH:

MATERIALS:

Medium-duty Dump Trucks (15,000 GVW and up) RTG: 198cm - 213cm, RTG-XL: 213cm - 228cm UTG: 224cm or 244cm Salt, 50/50 Salt-Sand Stainless Steel

Safety Interlock System

Our Safety Interlock System (electric or hydraulic) disables the auger when opening the bottom door making maintenance much safer and easier.



Center discharge for complete lane coverage

Whether you need a UTG or RTG, Meyer electric dump truck spreaders are perfect for parking lots because the center drop allows for complete lane coverage. It's only available from Meyer.



HOTSHOT

BROADCAST SPREADERS FOR YEAR-ROUND LISE QUICK FACTS

Meyer Hotshots are to handle extreme co solution for keeping

	TYPE:	Broadcast Spreader				
compact, easy to maneuver and built	CAPACITY:	25L (32kg); 28L (39kg);				
onditions. Hotshots are the perfect		35L (45kg); 42L (54kg)				
walkways clear of snow and ice.	MATERIALS:	Bagged Rock Salt, Free-flowing				
1	OONOTRUCTION	Granular Material				
	CONSTRUCTION:	Hopper - Polypropylene				
	~	Frame - Carbon Steel or Stainless				
	1988					
and a second second	11					
		HOTSHOT-120				
HOTSH						
		Stanges -				
		A Party Supervision				
HOT	SHOT	HOTSHOT-85				
T CALLER CONTRACT		Hotshot 120				
Hotshot 70 HD						
	A CONTRACT					
		Hotshot 85				
H	lotshot 70	SEE PAGE 20 FOR				

DETAILED SPECIFICATIO

HOTSHOT

HOTSH

Hotshot 100 HD

DROP SPREADERS FOR EXACT MATERIAL PLACEMENT

Meyer Hotshot Drop Spreaders are perfect for spreading material on walkways or pathways. Choose from a polyethylene 23kg capacity or a 45kg stainless steel capacity spreader to keep your walkways and pathways clear.

QUICK FACTS

TYPE:	Drop Spreader
CAPACITY:	23kg or 45kg
MATERIALS:	Bagged Rock Salt, Free-flowing Granular Material
CONSTRUCTION:	Hopper - Polyethylene or Stainless Stee Frame - Metal with Powder Paint

HOTSHOT-50

Hotshot 50

Hotshot 100

SEE PAGE 20 FOR DETAILED SPECIFICATIONS



www.meyerproducts.com

BL-125

A TAILGATE SPREADER FOR ATVs

The BL-125 tailgate spreader is perfect for tight areas and walkways. It features an elevated heavy-duty electric motor built to withstand the harshest conditions. A fitted rubber cover seals the motor ensuring reliable performance. The BL-125 frame features corrosion resistant gloss black powder paint for years of reliable use.



CA

SP

PE:	Rear Rack Mount
APACITY:	55kg
PREAD WIDTH:	0,9m - 6,0m
ATERIALS:	Salt, Calcium Chloride, Fertilizer and Seed
ONSTRUCTION:	Hopper - Polyethylene
	Frame - Metal with Powder Paint



Poly hopper

Standard with a built-in material agitator which spreads the flow of material evenly the first time



Impeller spinner shaft

Adjusts the spread pattern from 0,9m-6,1m. This feature saves time and money because you are able to spread material exactly where you need it every time.



SEE PAGE 21 FOR DETAILED SPECIFICATIONS

CROSS CONVEYOR

TURN YOUR DUMP TRUCK INTO A WORKHORSE

Whether you are shouldering material, filling a ditch, patching asphalt or spreading sand*, this heavy-duty conveyor system saves you labor, time and material.



QUICK FACTS

VEHICLES:	Medium-duty Dump Trucks (GVW 7, 5 tons and up)
TYPE:	Dump Truck Tailgate
FLOW RATE:	215 tons per hour
MATERIALS:	Asphalt, Granular Materials
CONSTRUCTION:	Carbon Steel or Stainless Steel



High temperature belt over chain

High temperature, belt-over chain conveyor makes dump truck functional during non-spreading activities.

Screw-type gate jacks

Allows material output adjustment when loaded.

SEE PAGE **21** FOR DETAILED SPECIFICATIONS

* Requires optional spinner attachment. Not recommended for straight salt application.





ANTI-ICERS

FEATURES UNIQUE SPACE-SAVING TANK DESIGN

Meyer's anti-icer fits between the wheel wells of the vehicle and cab allowing you to utilize the bed to carry other equipment. Available in four sizes, there's an anti-icer that's perfect for pre-treating parking lots, roads and walkways.

QUICK FACTS

VEHICLES: TYPE: CAPACITY: MATERIALS: CONSTRUCTIO Pick-ups and Utility Vehicles Liquid Applicator 380L, 760L, 1140L or 1520L Liquid, De-icing Material Corrosion Resistant Polyethylene

Adjustable spray nozzle

Spray boom features 5cm or 5 hand adjustable spray nozzles for precise material placement. Each nozzle features 3 different spray patterns.



Easily fits in utility vehicles The 378L unit fits in most utility vehicles.

* 2 nozzle boom for 378L unit only, all others use 5 nozzle boom.

SEE PAGE **22** FOR DETAILED SPECIFICATIONS



TAILGATE SPREADERS - BLASTER

	BLASTER SPECIFICATIONS											
Model	Part #	Hopper Length	Capacity	Weight	Height	Width	Length	Hopper	Operating System	Material	Mounting Method	Vehicle Application
Blaster 350	32000	N/A	180L 160kg	79kg	90cm	124cm	61cm	Poly	1/2 HP/350w 12V Electric	Bagged Rock Salt	5cm receiver (std); Cat. 1, 3 point hitch (opt); Flatbed Utility Adapter (opt)	SUV, Light truck, 1/2 ton+
Blaster 350S w/Vibrator	37000	N/A	180L 160kg	84kg	90cm	124cm	61cm	Poly	1/2 HP/350w 12V Electric	Sand	5cm receiver (std); Cat. 1, 3 point hitch (opt); Flatbed Utility Adapter (opt)	SUV, Light truck, 1/2 ton+
Blaster 750	33000	N/A	360L 340kg	90kg w/o mount	113cm	124cm	61cm	Poly	1/2 HP/350w 12V Electric	Bagged Rock Salt	Hinged, Dump, Fixed, Flat Bed (all optional)	1/2 ton+
Blaster 750S w/vibrator	39000	N/A	360L 340kg	90kg w/o mount	113cm	124cm	61cm	Poly	1/2 HP/350w 12V Electric	Sand	Hinged, Dump, Fixed, Flat Bed (all optional)	1/2 ton+
Blaster 750R	33750	N/A	360L 340kg	104kg w/o mount	113cm	124cm	61cm	Poly	1/2 HP/350w 12V Electric	Bagged 50/50 Rock Salt	Integrated 5cm receiver	1/2 ton+
Blaster 750RS	39010	N/A	360L 340kg	108kg	113cm	124cm	61cm	Poly	1/2 HP/350w 12V Electric	Sand	Integrated 5cm receiver	1/2 ton+

BLASTER ACCESSORIES									
	Blaster 350	Blaster 350S	Blaster 750	Blaster 750S	Blaster 750R	Blaster 750RS			
3 Point Hitch Mounting	36500	36500	N/A	N/A	36500	36500			
Flatbed Vehicle Mount	35002	35002	35002	35002	N/A	N/A			
Fixed Tailgate Mount	N/A	N/A	35200	35200	N/A	N/A			
Dump Body Mount	N/A	N/A	35300	35300	N/A	N/A			
Flat Bed Tailgate Mount	N/A	N/A	35400	35400	N/A	N/A			
Hinged Tailgate Mount	N/A	N/A	35500	35500	N/A	N/A			
Sand/Salt Vibrator Kit	34600	Included	34600	Included	34600	Included			
Hopper Screen 5cm x 5cm	34700	34700	34700	34700	34700	34700			
Hopper Screen 1,27 x 1,27cm	34701	34701	34701	34701	34701	34701			
Receiver Hitch Lock 7,5cm	07695	07695	N/A	N/A	07695	07695			
Flow Gate Assembly	34900	34900	34900	34900	34900	34900			
Industrial Light Kit RD	34609	34609	34609	34609	34609	34609			
Industrial Light Kit HD	34610	34610	34610	34610	34610	34610			
Universal Motor Guard	36407	36407	36407	36407	36407	36407			
Fine Salt Auger Kit*	34118	34118	34118	34118	34118	34118			
Chain Auger Kit*	34109	34109	34109	34109	34109	34109			
Coarse Material Brush Auger Kit	34300	34300	34300	34300	34300	34300			
Fine Material Brush Auger Kit	34301	34301	34301	34301	34301	34301			

* Recommended to use with Sander/Vibrator kit 34600

TAILGATE SPREADERS – BL SPREADERS AND MATE™

	BL SPREADERS SPECIFICATIONS									
Model	Model Part # Capacity Height Weight Width Depth Hopper Operating System Mounting Method Vehicle Application									
BL240	31100	100L 110kg	51cm	43kg	58cm	46cm	Poly	1/8 HP/120w 12V Electric	5cm receiver hitch mount (stnd)	Class 1, SUV's, Light Truck, 3/4 or 1 Ton Trucks and Utility Vehicles
BL400	36100	175L 180kg	91cm	60kg	71cm	71cm	Poly	1/8 HP/120w 12V Electric	5cm receiver hitch mount (stnd)	Class 1, SUV's, Light Truck, 3/4 or 1 Ton Trucks and Utility Vehicles

MATE [™] SPECIFICATIONS										
Model	Model Part # Capacity Weight Height Width Depth Hopper Operating System Mounting Method Vehicle Application									
Mate XL	38000	250L 270kg	98kg	79cm	122cm	84cm	Poly	120w 12V Electric	Tailgate Strap	1/2 ton - 1 ton (2-3 GVW Class)

BL240/400 AND MATE [™] ACCESSORIES								
	BL240/BL400	Mate™						
3 Point Hitch Mounting	36500	38200						
Salt Screen	N/A	38260						
Tailgate Swing Kit	N/A	35150						
Motor Guard	N/A	38250						
Spreader Controller	34405	22800						
Flow Gate Controller	34900	N/A						
Vibrator Kit	34606	N/A						
The Big Yellow Box	32403	32403						
LED Rear Light Package	34610	N/A						
Halogen Rear Light Package	34609	N/A						
Receiver Hitch Lock	07695	07695						
Meyer Dielectric Grease	15632	15632						
Meyer Coolube Grease – Cartridge	15182	15182						
Meyer Chain and Cable Lube – Aerosol	15184	15184						
Meyer Coolube Grease – Aerosol	15186	15186						
Meyer Sno-Flow Industrial Paint – Brush Yellow (4/,9L cans/UPS)	08755	08755						
Meyer Sno-Flow Industrial Paint – Spray Case Yellow (12 cans/case)	08677	08677						
Meyer Sno-Flow Industrial Paint – Spray Case Black (12 cans/case)	08676	08676						

INSERT HOPPER SPREADERS – CROSSFIRE AND POLYHAWK

	CROSSFIRE SPECIFICATIONS												
Model	Part #	Hopper Length	Capacity	Pre-Wet Capacity	Weight	Height	Width	Length	Bottom Width	Hopper	Operating System	Mounting Method	Drive System
CF-6 Standard	64740	233cm	1,1 m ³	N/A	190kg	94cm	178cm	239cm	100cm	233cm	Dual 1/2 HP/370w 12V Electric	Strap	Auger
CF-8 Standard	64742	300cm	1,5 m³	N/A	283kg	94cm	178cm	239cm	116cm	300cm	Dual 1/2 HP/370w 12V Electric	Strap	Auger
CF-6 Deluxe	64741	233cm	1,1 m ³	662L	190kg	94cm	178cm	239cm	100cm	233cm	Dual 1/2 HP/370w 12V Electric	Strap	Auger
CF-8 Deluxe+	64743	300cm	1,5 m³	757L	283kg	94cm	178cm	239cm	116cm	300cm	Dual 1/2 HP/370w 12V Electric	Strap	Auger

CROSSFIRE ACCESSORIES									
Description	CFS-6	CFS-8	CFD-6	CFD-8					
Extended Spinner Chute Assembly	64758	64758	64758	64758					
Vibrator Kit	63390	63390	63390	63390					
Pre-Wet Kit (For Standard Models)	64759	64759	Included	Included					
Side Extension	64762	64763	64762	64763					
GPS Ground Speed Control Kit	N/A	N/A	64754	64754					
Tarp Kit	64744	64745	64744	64745					
Top Screen	64746	64747	64746	64747					

POLYHAWK SPECIFICATIONS												
Model	Part #	Hopper Length	Capacity	Weight	Height	Width	Length	Bottom Width	Hopper	Operating System	Mounting Method Hold Down Kit	Conveyor Type
PolyHawk PV B&S (10.5 HP)	66074	1,8m	1,1 m ³	283kg	89cm	127cm	229cm	99cm	183cm	10,5 HP/7,8kw B&S gas	Part #62562	Drag Chain
PolyHawk PV Honda (11 HP)	66075	1,8m	1,1 m³	283kg	89cm	127cm	229cm	99cm	183cm	11 HP/8,2kw Honda gas	Part #62562	Drag Chain
PolyHawk PV Electric	66076	1,8m	1,1 m³	293kg	89cm	127cm	229cm	99cm	183cm	Dual 1/2HP/370w 12V Electric	Part #62562	Drag Chain
PolyHawk PV Central Hydraulic	66077	1,8m	1,1 m³	272kg	89cm	127cm	229cm	99cm	183cm	Central Hydraulics	Part #62562	Drag Chain
PolyHawk PV B&S (10.5 HP)	63898	2,4m	1,5 m³	385kg	89cm	127cm	290cm	120cm	244cm	10,5 HP/7,8kw B&S gas	Part #62562	Drag Chain
PolyHawk PV Honda (11 HP)	63899	2,4m	1,5 m³	385kg	89cm	127cm	290cm	120cm	244cm	11 HP/8,2kw Honda gas	Part #62562	Drag Chain
PolyHawk PV Electric	64505	2,4m	1,5 m³	388kg	89cm	127cm	290cm	120cm	244cm	Dual 1/2HP/370w 12V Electric	Part #62562	Drag Chain
PolyHawk PV Central Hydraulic	63901	2,4m	1,5 m³	352kg	89cm	127cm	290cm	120cm	244cm	Central Hydraulics	Part #62562	Drag Chain

INSERT HOPPER SPREADERS – LPV

	LPV SPECIFICATIONS												
Model	Part #	Hopper Length	Capacity	Weight	Height	Width	Length	Bottom Width	Hopper	Operating System	Mounting Method Hold Down Kit	Vehicle Application	Conveyor System
LPV- Electric Utility	63394	90cm	230L	180kg	63cm	91cm	142cm	61cm	Stainless Steel	1/2 HP/370w 12V Electric	Part #62562	Utility Vehicle	Belt over Chain
LPV- Electric Utility	63395	120cm	330L	197kg	63cm	91cm	172cm	61cm	Stainless Steel	1/2 HP/370w 12V Electric	Part #62562	Utility Vehicle	Belt over Chain

LPV ACCESSORIES									
LPV ,9m SS LPV 1,2m SS									
15cm Side Extension	N/A	N/A							
LPV, PV Hold Down Kit	62562	62562							
Battery Harness Kit N/A N/A									

	PV SPECIFICATIONS												
Model		Hopper Length	Capacity	Weight	Height	Width	Length	Bottom Width	Hopper	Operating System	Mounting Method Hold Down Kit	Vehicle Application	Conveyor System
BL600	64238	1.8m	1,1 m ³	211kg	86cm	127cm	235cm	87cm	Stainless Steel	6,5 HP/4,8kw B&S Gas	Part #62562	3/4 ton + (2-3 GVW Class)	Drag Chain
PV-B&S 10.5 HP	63790	2,1m	1,4 m ³	445kg	86cm	127cm	259cm	87cm	Stainless Steel	10,5 HP/7,8kw B&S Gas	Part #62562	3/4 ton + (2-3 GVW Class)	Drag Chain
PV-Honda 11.0 HP	63791	2,1m	1,4 m ³	445kg.	86cm	127cm	259cm	87cm	Stainless Steel	11 HP/8,2kw Honda Gas	Part #62562	3/4 ton (2-3 GVW Class)	Drag Chain
PV-B&S 10.5 HP	63792	2,4m	1,5 m ³	471kg	86cm	127cm	290cm	87cm	Mild Steel	10,5 HP/7,8kw B&S Gas	Part #62562	1 ton 2-3 GVW Class)	Drag Chain
PV-B&S 10.5 HP	63794	2,4m	1,5 m ³	471kg	86cm	127cm	290cm	87cm	Stainless Steel	10,5 HP/7,8kw B&S Gas	Part #62562	1 ton (2-3 GVW Class)	Drag Chain
PV-Honda 11.0 HP	63795	2,4m	1,5 m ³	471kg	86cm	127cm	290cm	87cm	Stainless Steel	11 HP/8,2kwHonda Gas	Part #62562	1 ton (2-3 GVW Class)	Drag Chain
PV Dual Electric	64448	2,4m	1,5 m ³	431kg	86cm	127cm	290cm	87cm	Stainless Steel	1/2 HP/370w Dual Elec Motors	Part #62562	1 ton (2-3 GVW Class)	Drag Chain

PV ACCESSORIES										
	PV 7 Ft. SS 10.5HP B&S	PV 7 Ft. SS 11HP Honda	PV 8 Ft. SS 10.5HP B&S	PV 8 Ft. SS 11HP Honda	PV 8 Ft. SS Dual Elec.					
LPV, PV Hold Down Kit	62562	62562	62562	62562	62562					
LPV, PV Vehicle Wiring Harness	62565	62565	62565	62565	N/A					
Wireless Controller Package (Gas)	63688	63688	63688	63688	N/A					
PV 15cm Side Extensions SS	63925	63925	63926	63926	63926					
Vibrator Kit	63390	63390	63390	63390	63390					
PV Tarp Kit 114L (1, & 1,5m ³)	62546	62546	62546	62546	62546					
30 Gal. PV Pre-Wet System 114L (2x57L)	63938	63938	63938	63938	63938					

INSERT HOPPER SPREADERS - MDV

	MDV SPECIFICATIONS												
Model	Part #	Hopper Length	Capacity	Weight	Height	Width	Length	Bottom Width	Hopper	Operating System	Mounting Method Hold Down Kit	Flow Rate	Conveyor Type
MDV-944 B&S-SS	63948	370cm	3,0 m ³	640kg	112cm	178cm	323cm	100cm	Stainless Steel	10,5 HP/7.8kw B&S Gas	Part #62562	N/A	Drag Chain
MDV-944 Honda-SS	63949	270cm.	3,0 m ³	640kg	112cm	178cm	323cm	100cm	Stainless Steel	11 HP/8,2kw Honda Gas	Part #62562	N/A	Drag Chain
MDV-944 Hydraulic-SS	63950	270cm	3,0 m ³	567kg	112cm	178cm	323cm	100cm	Stainless Steel	Central Hydraulics	Part #62562	58 LPM @ 1,500 PSI (max)	Drag Chain
MDV-1044 B&S-SS	63954	300cm	3,4 m ³	712kg	112cm	178cm	353cm	100cm	Stainless Steel	10,5 HP/7.8kw B&S Gas	Part #62562	N/A	Drag Chain
MDV-1044 Honda-SS	63955	300cm	3,4 m ³	712kg	112cm	178cm	353cm	100cm	Stainless Steel	11 HP/8,2kw Honda Gas	Part #62562	N/A	Drag Chain
MDV-1044 Hydraulic-SS	63956	300cm	3,4 m ³	647kg	112cm	178cm	353cm	100cm	Stainless Steel	Central Hydraulics	Part #62562	58 LPM @ 1,500 PSI (max)	Drag Chain
MDV-944 Hydraulic Auger	63615	270cm	3,0 m ³	544kg	112cm	178cm	323cm	100cm	Stainless Steel	Central Hydraulics	Part #62562	58 LPM @ 1,500 PSI (max)	Auger
MDV-1044 Hydraulic Auger	63619	300cm	3,4 m ³	617kg	112cm	178cm	353cm	100cm	Stainless Steel	Central Hydraulics	Part #62562	58 LPM @ 1,500 PSI (max)	Auger
MDV-A 844	64451	240cm	2,7 m ³	526kg	112cm	178cm	315cm	100cm	Stainless Steel	12V Electric Auger	Part #62562	N/A	Auger
MDV-A 944	64539	270cm	3,0 m ³	599kg	112cm	178cm	345cm	100cm	Stainless Steel	12V Electric Auger	Part #62562	N/A	Auger
MDV-A 1044	64540	300cm	3,4 m ³	671kg	112cm	178cm	376cm	100cm	Stainless Steel	12V Electric Auger	Part #62562	N/A	Auger

	MDV ACCESSORIES										
	MDV-A844 Auger Elec.	MDV-944 SS 10.5HP B&S	MDV-944 SS 11HP Honda	MDV-944 SS Hydr.	MDV-944 SS Hydr. Auger	MDV-A944 Auger Elec.	MDV-1044 SS 10.5HP B&S	MDV-1044 SS 11HP Honda	MDV-1044 SS Hydr.	MDV-1044 SS Hydr. Auger	MDV-A1044 Auger Elec.
Wireless Controller Package (Gas)	N/A	63688	63688	N/A	N/A	N/A	63688	63688	N/A	N/A	N/A
Chain Oiler	N/A	62126	62126	62126	62126	N/A	62126	62126	62126	N/A	N/A
30cm Side Extensions	64578	64128	64128	64128	64128	64580	64130	64130	64130	64130	64582
228L (2x114L) MDV Pre-Wet System (113L)	64131	64131	64131	64131	64131	64131	64131	64131	64131	64131	64131
Vibrator Kit	63390	63390	63390	63390	63390	63390	63390	63390	63390	63390	63390

DUMP TRUCK SPREADERS - UTG AND RTG

	UTG SPECIFICATIONS									
Model	Part #	Hopper Length	Capacity	Weight	Height	Width	Depth	Hopper	Operating System	
BL960	64230	N/A	N/A	204kg	48cm	244cm	46cm	Stainless Steel	Hydraulic	
UTG Direct Drive-SS	63546	N/A	N/A	245kg	48cm	244cm	46cm	Stainless Steel	Hydraulic	
UTG Gear Drive-SS	63548	N/A	N/A	259kg	48cm	244cm	46cm	Stainless Steel	Hydraulic	
UTG CD Electric	63902	N/A	N/A	204kg	48cm	244cm	46cm	Stainless Steel	1/2 HP/370w 12V Electric	
UTG DD Electric	63903	N/A	N/A	204kg	48cm	244cm	46cm	Stainless Steel	1/2 HP/370w 12V Electric	

	RTG SPECIFICATIONS									
Model	Model Part # Length Capacity Weight Height Width Width (ID) Depth Hopper Operating System									
RTG CD Electric	ATG CD Electric 63907 N/A N/A 245kg 58cm 213cm 229cm 42cm Stainless Steel 1/2 HP/370w 12V Electric									

UTG AND RTG ACCE	SSORIES	
	UTG	RTG
Control Valve (Hydraulic Units Only)	62213	62213
Central Hose Kit (Hydraulic Units Only)	62214	62214
Central Pump Kit (Hydraulic Units Only)	61199	61199
Central 18L Tank Kit (Hydraulic Units Only)	61193	61193
513L UTG Pre-Wet System	63921	N/A
Dielectric Grease	15632	15632
Paint Yellow Spray (12/case)	08677	08677
Paint Yellow Cans (4/,9L)	08755	08755
Paint Black Spray (12/case)	08676	08676

WALK BEHIND BROADCAST SPREADERS – HOTSHOTS

	HOTSHOT SPECIFICATIONS											
Model	Part #	Capacity	Weight	Handle Height*	Height	Width	Length	Hopper	Frame	Operating System	Spreading Width	Material
Hotshot 85	38115	28L	9kg	95cm	64cm	58cm	89cm	Poly	Carbon	Manual	3,2m	Sand, Salt, Seed and Any Free Flowing Material
Hotshot 120	38210	42L	19kg	99cm	75cm	76cm	102cm	Poly	Stainless	Manual	5,5m	Sand, Salt, Seed and Any Free Flowing Material
Hotshot 70 RD	38170	25L	11kg	97cm	71cm	74cm	104cm	Poly	Carbon	Manual	3,5m	Sand, Salt, Seed and Any Free Flowing Material
Hotshot 70 HD	38180	25L	16kg	105cm	66cm	71cm	122cm	Poly	Stainless	Manual	3,5m	Sand, Salt, Seed and Any Free Flowing Material
Hotshot 100 HD	38160	35L	19kg	105cm	71cm	74cm	122cm	Poly	Stainless	Manual	5,5m	Sand, Salt, Seed and Any Free Flowing Material

* At level

HOTSHOT ACCESSORIES*									
	Hotshot 50 Hotshot 70 Hotshot 70 HD Hotshot 85 Hotshot 100 HD Hotshot								
Weather Cover/Shower Cap	PSB16443	PSB14606	PSB14606	AF40883	PSB14872	AF40825			
Salt Deflector Shield	N/A	PSB15464	PSB15972	N/A	PSB16096	AF46119			
Internal Top Screen	N/A	PSB14603	PSB14603	N/A	PSB14863	AF47441			

* Replacement items/all Hotshots come standard with above accessories

DROP SPREADER - HOTSHOT 50 AND HOTSHOT 100

	DROP SPREADER SPECIFICATIONS										
Model	Part #	Capacity	Weight	Handle Height*	Height	Width	Depth	Hopper	Operating System	Spreading Width	Material
Hotshot 100 Drop	38191	50L	20kg	83cm	42cm	124cm	112cm	Stainless Steel	Manual	90cm	Salt, 50/50 Salt/Sand and Sand
Hotshot 50 Drop	38185	23L	16kg	117cm	25cm	51cm	20cm	Poly	Manual	50cm	Sand, Salt, Seed and Any Free Flowing Material

* At level

ATV SPREADER

	ATV SPREADER SPECIFICATIONS										
Model	Part #	Capacity	Weight	Height	Width	Depth	Hopper	Operating System	Mounting Method	Vehicle Application	
BL 125	31125	57kg	20kg	91cm	75cm	42cm	Poly	1/16 HP/50w 12V Electric	Universal	ATV	

DUMP TRUCK CROSSOVER CONVEYOR

TAILGATE CROSSOVER CONVEYOR SPECIFICATIONS											
Model	Model Part # Length Capacity Weight Height Width Depth Hopper Operating System Mounting Method Vehicle Applica						Vehicle Application				
Cross Conveyor-STCC	62729	259cm	N/A	498kg	81cm	259cm	N/A	Mild Steel	Hydraulic	Under Tailgate	Dump Body (5-6-7 GVW Class)

TAILGATE CROSSOVER CONVEYOR ACCESSORIES									
	102" STCC Cross Conveyor								
Chain Oiler	62126								
Hose Kit Hydr. Spreader	61199								
Rear Light Bar Kit	63957								
Reversing Valve	63958								
Spinner ACY Kit	63959								
Four Ft. Motorized Ext.	63960								
Conveyor End Extension	64704								
Folding Leg Stand	64703								
Central Hose Kit (Hydraulic Units Only)	62214								
Central Pump Kit (Hydraulic Units Only)	61199								
Central 27L Tank Kit (Hydraulic Units Only)	61193								
Dielectric Grease	15632								
Paint Yellow Spray (12/case)	08677								
Meyer Coolube Grease - Cartridge	15182								
Meyer Chain and Cable Lube - Aerosol	15184								
Meyer Coolube Grease - Aerosol	15186								
Paint Yellow Cans (4/,9Lqt.)	08755								
Paint Black Spray (12/case)	08676								

LIQUID APPLICATION (ANTI-ICERS)

Model	Tank Capacity	Weight	Height	Width	Depth	Hopper	Drive	Remote Start	Mounting Method	Vehicle Application
378L Tank Only	380L	185kg	89cm	168cm	99cm	Poly	6,5HP/4,8kw Power Pro	Yes	Slide In/Tension Bar	1/2 Ton+
757L Tank Only	760L	200kg	94cm	178cm	99cm	Poly	6,5HP/4,8kw Power Pro	Yes	Slide In/Tension Bar	3/4 Ton+
1135L Tank Only	1140L	213kg	94cm	178cm	99cm	Poly	6,5HP/4,8kw Power Pro	Yes	Slide In/Tension Bar	1 Ton+
1514L Tank Only	1520L	227kg	99cm	180cm	132cm	Poly	6,5HP/4,8kw Power Pro	Yes	Slide In/Tension Bar	1 Ton+

ANTI-ICER TANKS AND ACCESSORIES

Description	ITEM #
TANKS: All tanks include standard 6.5HP Subaru Engine, remote control and pump	I
380L TANK	64506
760L TANK	64507
1140L TANK	64508
1520L TANK	64509
ENGINE UPGRADE: Substitute a 5.5HP Honda engine with electric start	
HONDA 5.5HP ENGINE UPGRADE	64510
HOSE REEL: Note that an 95cm Hose reel is required in order to accommodate a 93m hose	
30cm MANUAL HOSE REEL	64511
30cm ELECTRIC HOSE REEL	64512
45cm MANUAL HOSE REEL	64513
45cm ELECTRIC HOSE REEL	64514
HOSE	
45m HOSE	64225
93m HOSE	64226
GUN	
STANDARD GUN KIT	64515
воом	
2 NOZZLE BOOM (USE WITH 380L ONLY)	64542
5 PORT BOOM (USE WITH 760L-1520L)	64543
OPTIONAL ACCESSORIES	
BLASTER/ANTI-ICER COMBO KIT: includes: Hose Barb, Hose, Nozzle Bracket, Nozzle Body and Boom Bracket	64516
DO ALL GUN	64224
ROOT FEEDER	64517
TREE GUN	64518
LITE-TREE GUN	64519
TERMITE TOOL	64520
TANK FILTER	64521
MEASURING WHEEL	64522
CARGO BAR	64223
PRESSURE GAUGE	64523



 Meyer Products LLC

 18513 Euclid Ave., Cleveland, Ohio 44112

 Phone: 216-486-1313

 Fax: 216-486-1321

 www.meyerproducts.com

Meyer Spreaders are protected by one or more of the following patents: 6698997, CA 2 415,540 C, 7588195, 8446882, 8505837, 8523086, 8657208, 6186731, 6,793,154 B2, 6722590, 6715703, 6978952, 6932287, 8505838, 8827002, 5482649, CA 2,435,106 C, 6364598.

Meyer Products LLC reserves the right, under its continuing product improvement program, to change construction or design details, specifications and prices without notice or without incurring any obligation.

DISTRIBUTED BY: